


# ALFRA ROTABEST® – RB 35 B

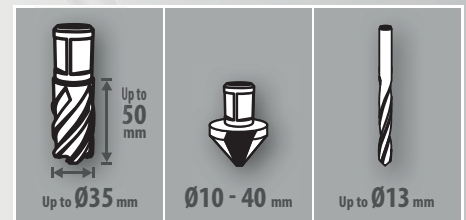

RB 35 B	
Core drill dimensions	Ø 12.0 - 35.0 mm
Cutting depth	50.0 mm
Twist drill	Ø 1.0 – 13.0 mm DIN 1897 short
Counterboring	Ø 10.0 - 40.0 mm
Arbors	19 mm Weldon shank
Stroke	120 mm
Gearbox - on-load speed	450 rpm
Power consumption	1,100 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Tool force (10 mm) / magnetic adhesion strength	2,100 N/9,000 N
Magnetic base	70 x 185 mm
Weight	10.6 kg
<b>Gearboxes</b>	
Oil-box gearbox	✓
Slide	
Self-adjusting guide	✓
<b>Operation</b>	
Soft-touch grips	✓
Ergonomic switch keyboard	✓
Cable length 5 m	✓
<b>Magnet</b>	
Metal rings	✓
Performance and weight optimisation	✓
<b>Made in Germany</b>	
✓	
<b>Scope of delivery</b>	
<ul style="list-style-type: none"> <li>• Metal core drill RB 35 B</li> <li>• Carrying case</li> <li>• Seat belt</li> <li>• Coolant device</li> <li>• Operating Instructions</li> <li>• <b>incl. 1 core drill free</b></li> </ul>	

## Prod.-No.

ALFRA Rotabest® RB 35 B	230 Volt	18400
ALFRA Rotabest® RB 35 B	110 Volt	18400.110